



Front view

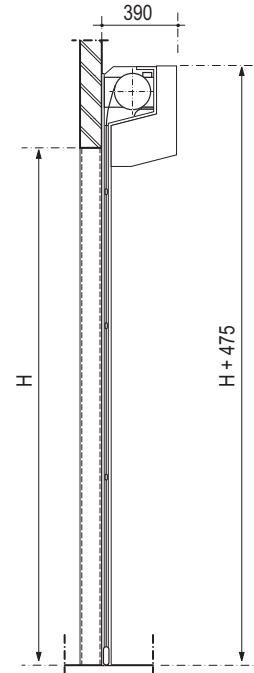



Side view



Section A

Section B

Minimum requirement for installation

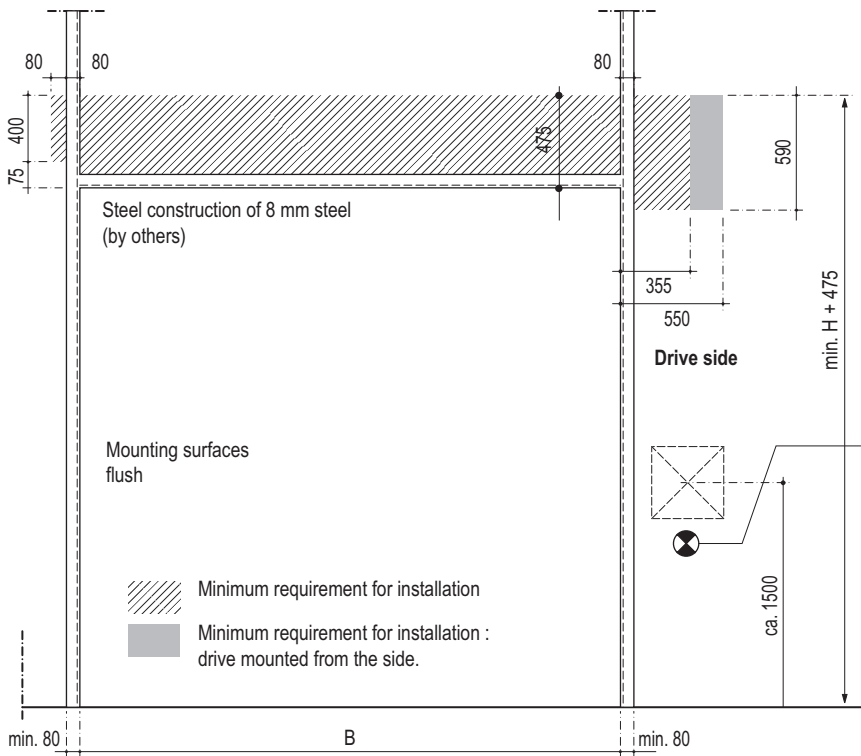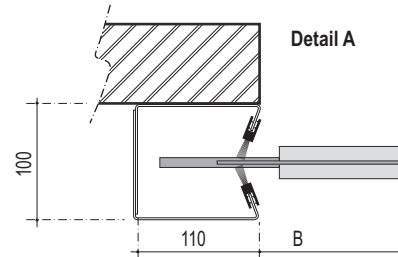

Mounting surfaces flush

- Minimum requirement for installation
- Minimum requirement for installation : drive mounted from the side.

Electrical supply CEE-plug socket (by others)

- Control box with contactors :
 - CEE-form 3-NPE 400V/50Hz/16A
 - Control box with frequency inverter :
 - CEE-form 1x230V/50Hz/T16A
 - Electrical supply by others
 - control box/ power supply, inside RIGHT
 - control box/ power supply, inside LEFT

Installation requirements

