



Front view

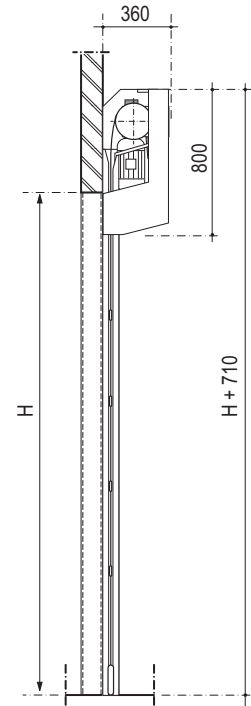


Side view

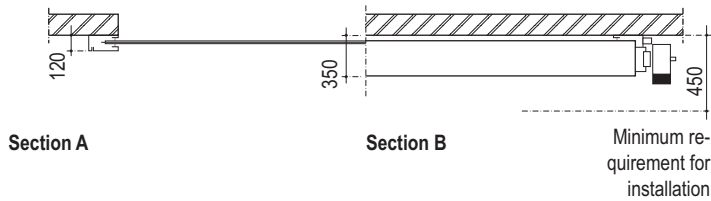


Section A

Section B

Minimum requirement for installation

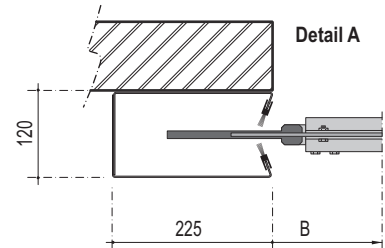

Detail A

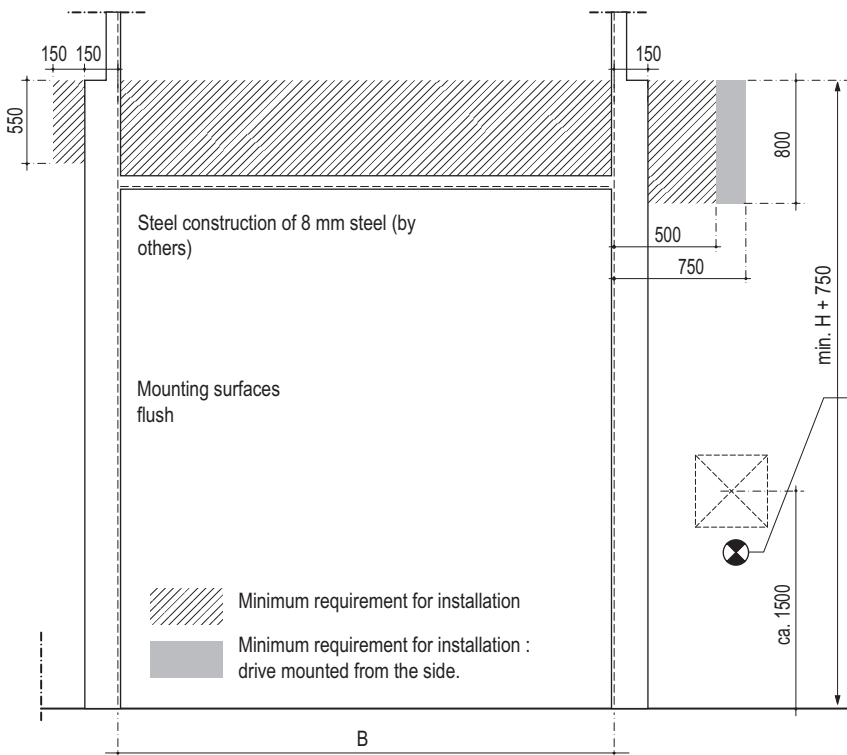

Drive side

Steel construction of 8 mm steel (by others)

Mounting surfaces flush

Minimum requirement for installation

Minimum requirement for installation : drive mounted from the side.

**INDOOR**

- Control box with contactors :
  - CEE-form 3~NPE 400V/50Hz/16A
- Control box with frequency inverter :
  - CEE-form 1x230V/50Hz/T16A

**OUTDOOR**

- Always :
  - CEE-form 3~NPE 400V/50Hz/T16A

Electrical supply by others

- control box/ power supply, inside RIGHT
- control box/ power supply, inside LEFT

**Installation requirements**

